

Baltic Double Heads



Quickinfo

GENERAL


Indoor Lighting-Recessed downlight
 Recessed
 IP20
 TRIDONIC
 100-240 V 50/60Hz
 Bridgelux
 Shinland
 Die-casting aluminum

OPTION

White Black

DIMENSIONS

size in mm

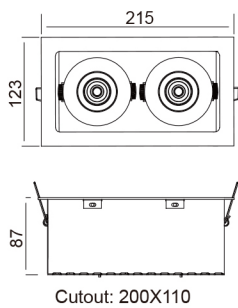

Purchase Code	Luminaire Power [W]	Luminaire Lumen [lm]	Color Temperature [K]	Beam Angle [°]	CRI [Ra]
2202.016.035.3000.80	2x8	2x610	3000	35	>80

ERP LABEL

DOBAC Baltic Double Heads
LED


This luminaire contains built-in LED lamps

A++
A+
A
B
C
D
E

} L
E
D

The lamps cannot be changed in the luminaire

847/2012

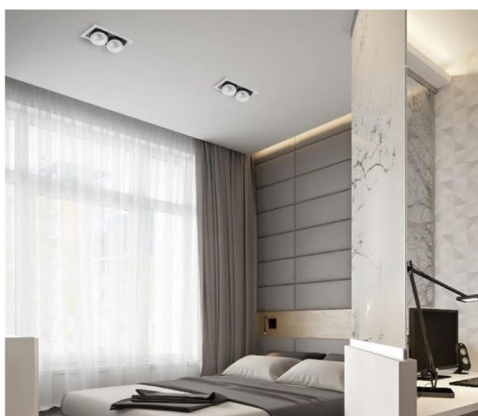

Sample image

Baltic Double Heads




2202.016.035.3000.80

Packing Info


8pcs / ctn
 G.W. 13.48kg
 ctn size 555x375x280 mm

35° 3000K CRI >80

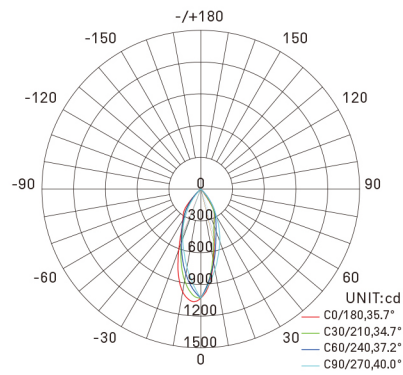

AVERAGE BEAM ANGLE(50%): 36.9 DEG

Flux out: 218.3 lm

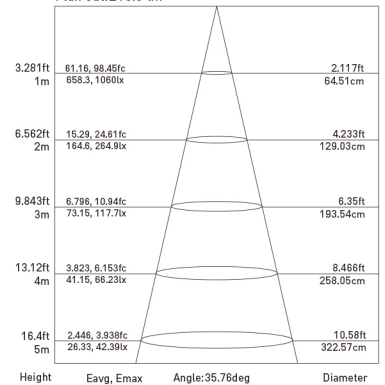

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

BALTIC FAMILY

- Baltic Basic
- Baltic Double Heads
- Baltic Three Heads
- Baltic Trimless
- Baltic Trimless Double Heads
- Baltic Trimless Three Heads

Baltic Basic



Baltic Double Heads



Baltic Three Heads



Baltic Trimless



Baltic Trimless Double Heads



Baltic Trimless Three Heads

