

Batumi Longer

1103.008.035.3000.80



Quickinfo

GENERAL

Indoor Lighting-Ceiling lights
Surface mounted
IP20
TRIDONIC
100-240 V 50/60Hz
Bridgelux
Shinland
Die-casting aluminum

LED

8 W
690 lm
3000 K
beam angle 35°
CRI > 80

OPTION


White Black

PACKING

12 PCS / CTN
G.W. 11.00 kg
CTN size 420x290x445 mm

DIMENSIONS

size in mm

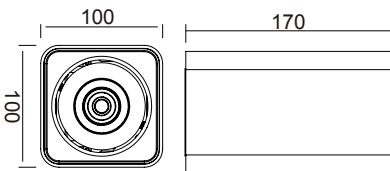

Sample image

ERP LABEL

DOBAC Batumi
LED Longer

This luminaire contains built-in LED lamps

A++ } L
A+ } E
A } D
~~**B**~~
~~**C**~~
~~**D**~~
~~**E**~~

The lamps cannot be changed in the luminaire


847/2012

Batumi Longer

1103.008.035.3000.80




35° 3000K CRI >80

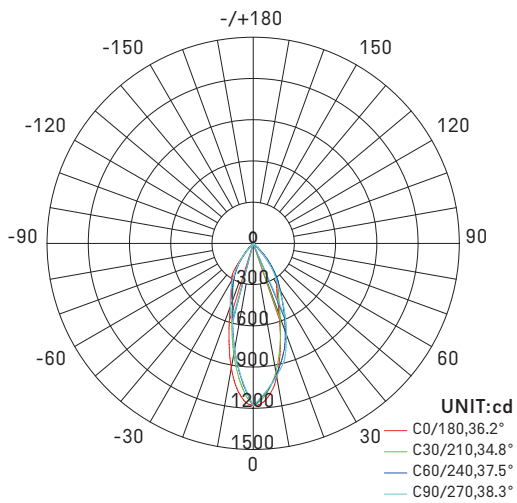

AVERAGE BEAM ANGLE(50%):36.7 DEG

Flux out:259.7 lm

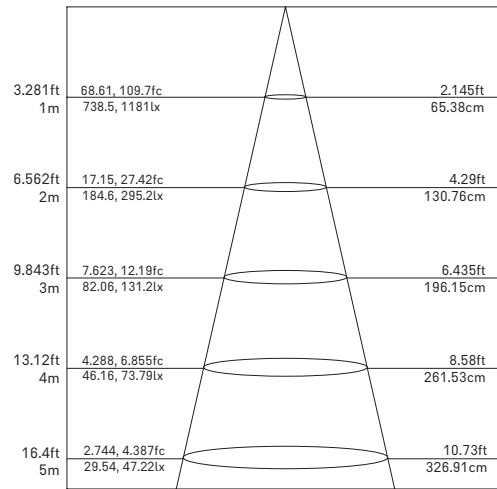

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

BATUMI FAMILY

- Batumi Single Head
- Batumi Double Head
- Batumi Longer

Batumi Single Head



Batumi Single Head



Batumi Longer

