

Batumi Single Head

1101.008.035.3000.80



Quickinfo

GENERAL

Indoor Lighting-Ceiling lights
Surface mounted
IP20
TRIDONIC
100-240 V 50/60Hz
Bridgelux
Shinland
Die-casting aluminum

LED

8 W
690 lm
3000 K
beam angle 35°
CRI > 80

OPTION


White Black

PACKING

18 PCS / CTN
G.W. 13.06 kg
CTN size 425x290x425 mm

DIMENSIONS

size in mm

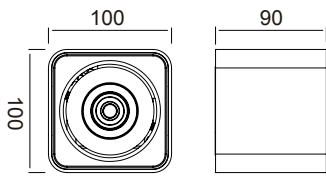

ERP LABEL

DOBAC Batumi
LED Single Head

This luminaire contains built-in LED lamps

A++
A+
A
B
C
D
E

L
E
D

The lamps cannot be changed in the luminaire

847/2012




Sample image

Batumi Single Head


1101.008.035.3000.80



35° 3000K CRI >80

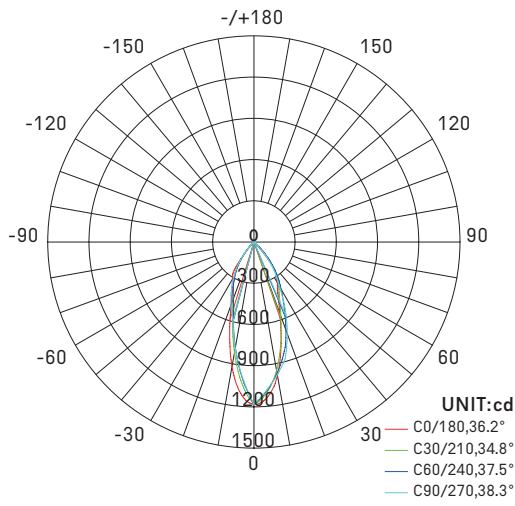

Flux out:259.7 lm

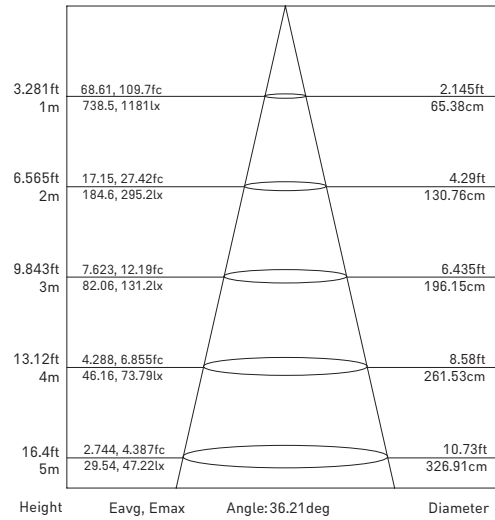

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

BATUMI FAMILY

- Batumi Single Head
- Batumi Double Head
- Batumi Longer

Batumi Single Head



Batumi Single Head



Batumi Longer

